
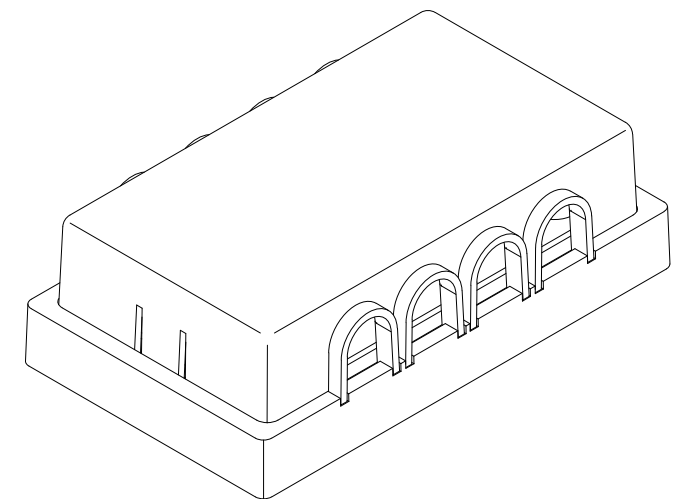
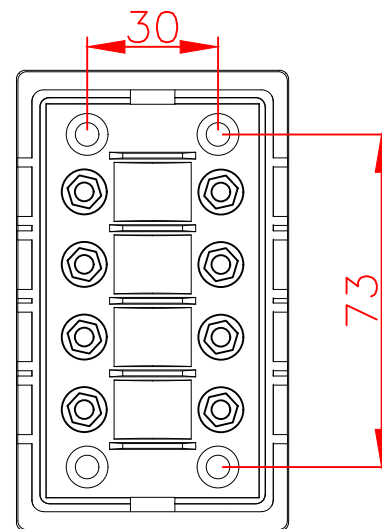
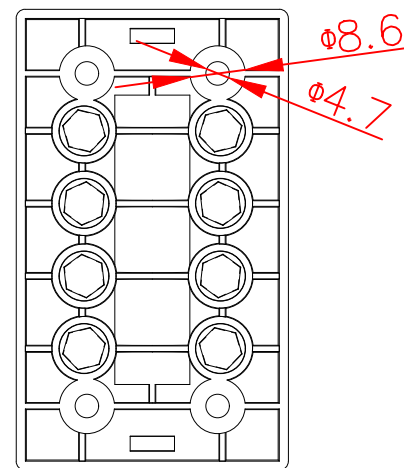
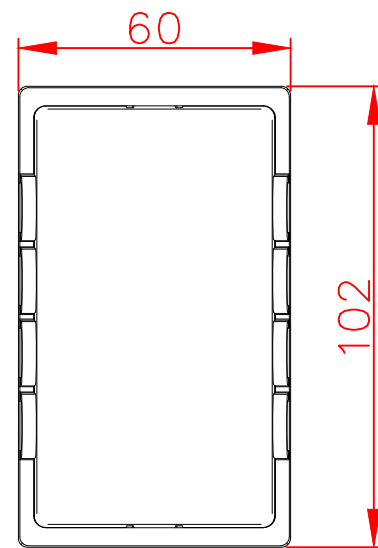


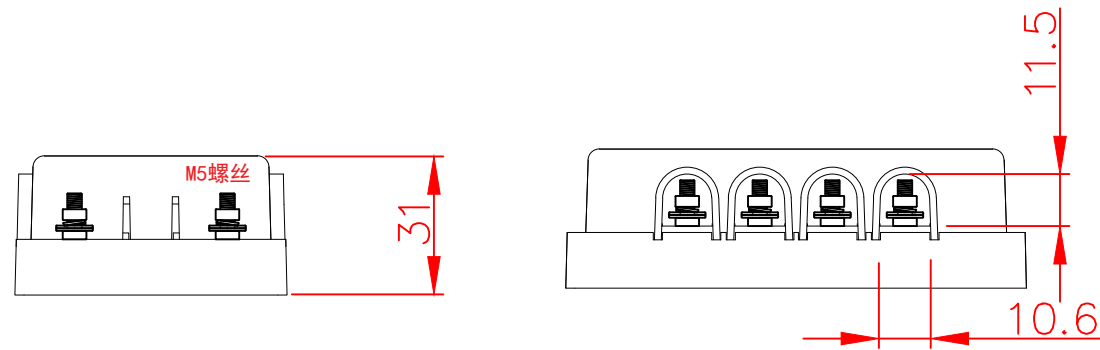

电气参数/SPECIFICATIONS:

ANM FUSEHOLDER

Model: BH-ANS-4P

FUSE: ANS/0498/SBFW-L

Electrical: Max.200A*4 32VDC/58VDC/70VDC

Insulating Boby: PC+PA66/GF15%

Insulation Resistance at 70VDC: Min.100M Ω

Operating Temperature: -40 to 125 $^{\circ}$ C

Ignition Protection: UL94-V2

Mounting Method: Bolt-Down/M5

Metal Part: Steel alloy galvanizing

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X $\pm$ 1 .X $\pm$ 0.5 $\pm$ 2 $^{\circ}$.XX $\pm$ 0.05 DO NOT SCALE DRAWING		CUSTOMER NO.	东莞市云恬电子科技有限公司
		DRAWN BY TIM.YU	Dongguan YTIM Electronic Technology Co., Ltd.
		CHECKED BY	TITLE FUSE HOLDER 保险丝盒
		APPROVED BY sophie	PART NO. BH-ANS-4P
P/N		DATE 2022-01-05	DRAWING NO. YTIMLINKS
REV	A	SCALE	